



12.00m  
[39'-4"]

64.00m  
[210']

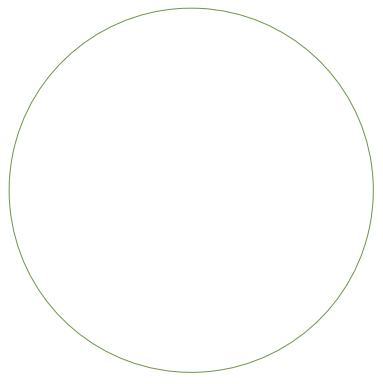


40.00m  
[131'-3"]

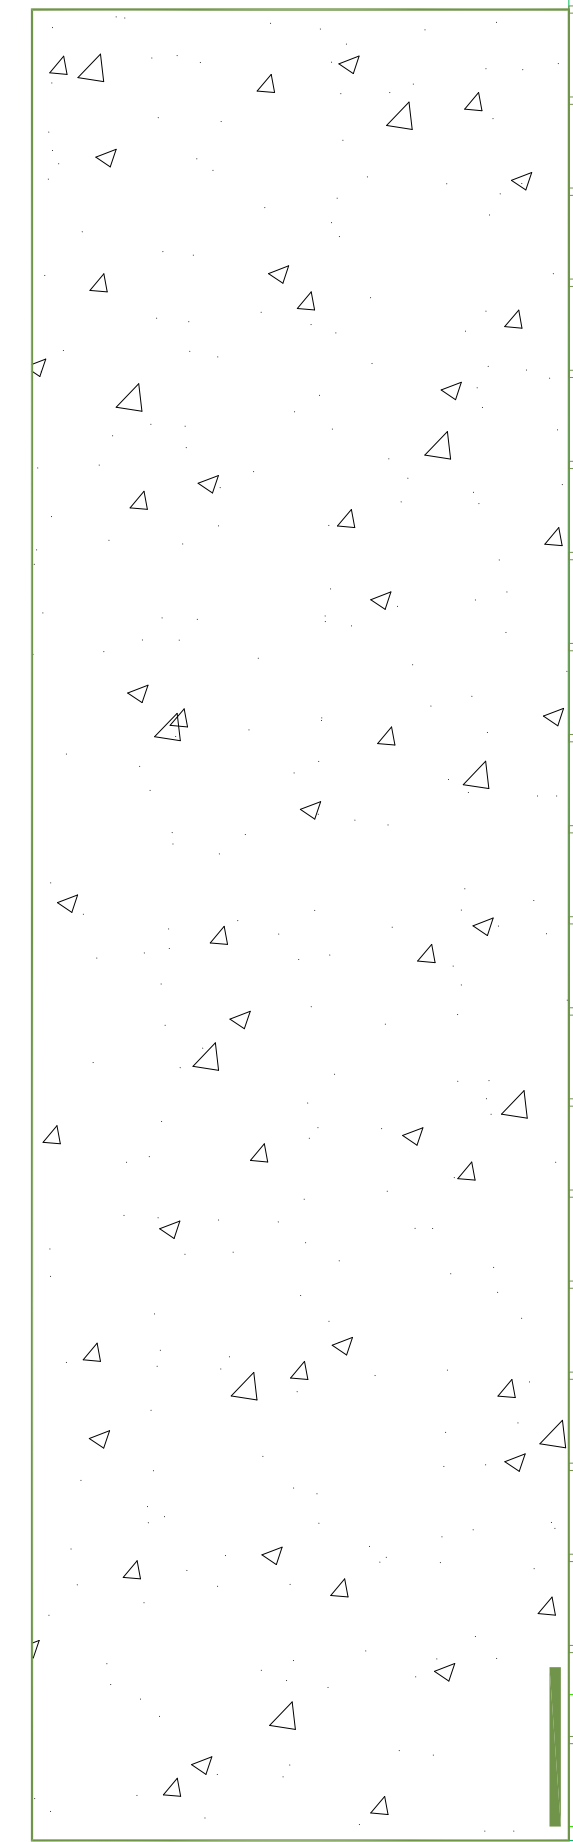

60.00m  
[196'-10"]

4.80m  
[15'-9"]

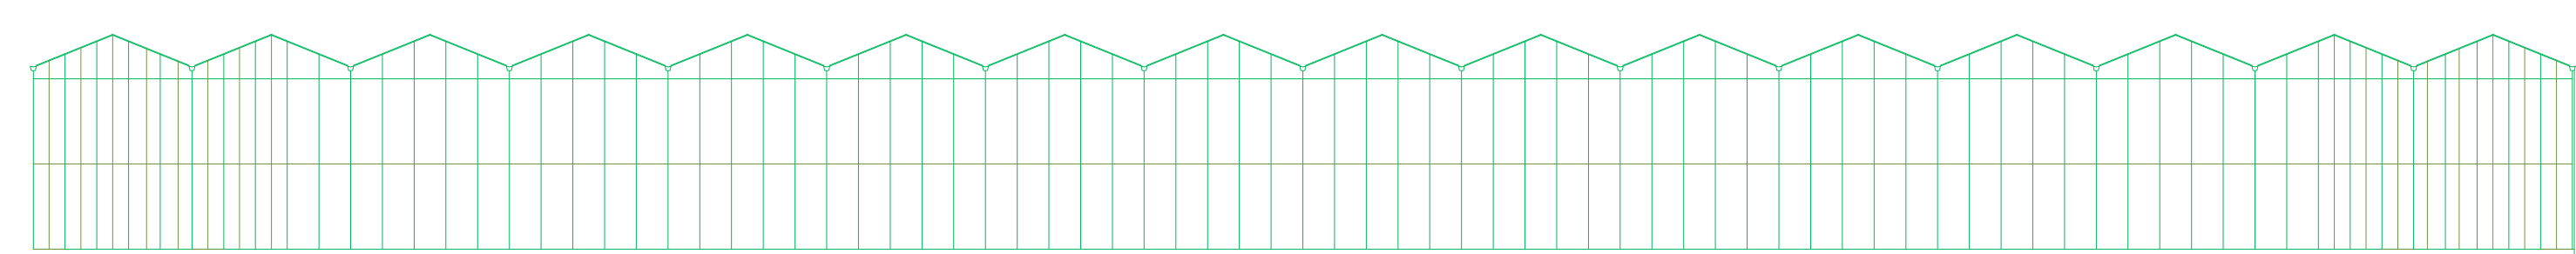

Basic 3.0		
Length	196 ft 10 in	(15x [13 ft 1 in] = 196 ft 10 in)
Width	210 ft	(8x [26 ft 3 in] = 210 ft)
Area	41,333 sq ft	1.0 Acre
Height	13 ft 1 in	
Snow load <sup>1</sup>	7.31 psf	
Crop load	3.13 psf	
Installation loads	1.46 psf	
Windspeed <sup>2</sup>	105 mph	
<sup>1</sup> In heavy snow areas a snow melt heating to be applied		
<sup>2</sup> Reduction factors apply		
Service Building Basic 3.0		
Length	131 ft 3 in	(10x [13 ft 1 in] = 131 ft 3 in)
Width	39 ft 4 in	(1x [39 ft 4 in] = 39 ft 4 in)
Area	5,167 sq ft	
Height	13 ft 1 in	
Energy and Irrigation room included with separation walls		
Packing handling and office space by local contractor inside this prefab building		